Quantum Microwave

www.QuantumMicrowave.com

Specifications:

- WR-22 Waveguide to 2.4mm Female Adapter
- Frequency: 33 to 50 GHz
- Insertion Loss: 0.4 dB typical, 0.7 dB max
- Return Loss: 18 dB typical, 16 dB minimum
- Connector: 2.4mm Female
- Waveguide WR-22, UG-383/U, Round
- Copper Waveguide with Brass Flanges
- Finish: Gold Plated

QMC-WC22-2.4FR is a Female Waveguide to Coaxial adapter designed to operate within the Q Band, with a frequency range of 33 to 50 GHz. This adapter is a WR-22 waveguide with precision tolerances. QMC-WC22-2.4FR is a gold plated, copper waveguide with brass flanges. This is a lab asset that will last for long periods of time.

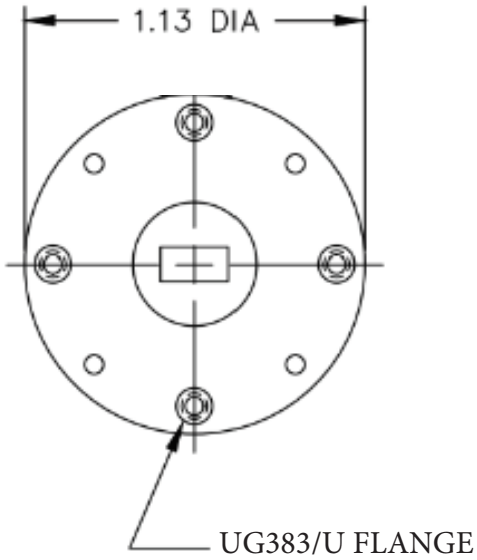

Made in the USA

Sales@QuantumMicrowave.com