


# Wide-Band Josephson Parametric Amplifier (WB-JPA)

Superconducting Low-Noise Amplifier for Quantum Computing

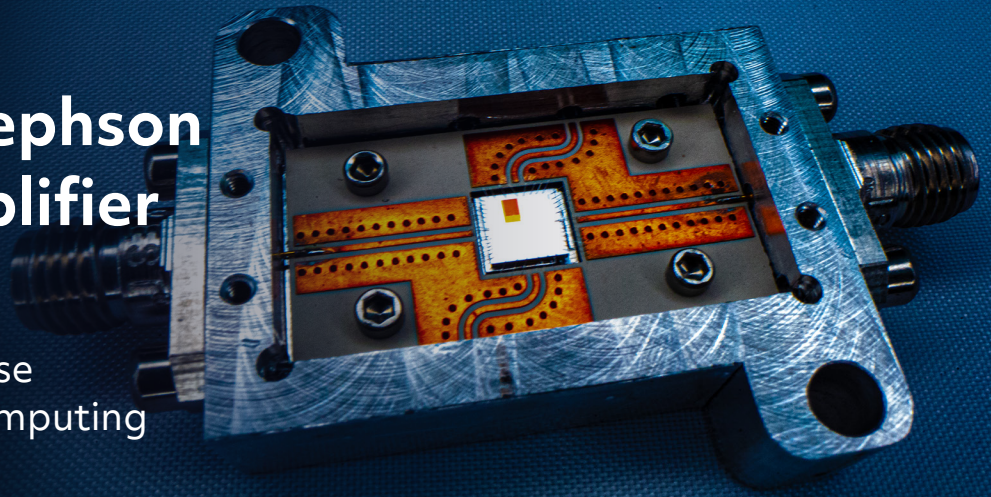

## RTX BBN Technologies' WB-JPA

Designed for use at millikelvin temperatures, the amplifier features over 20dB of gain with a center frequency that can be tuned with an on-chip bias line. The amplifier can be operated in either four-wave mixing, or three-wave mixing with an external bias tee.

The RTX BBN WB-JPA is available as the only off-the-shelf component of its kind and can be easily acquired through RTX BBN's distributor Quantum Microwave.

## Key Capabilities


### Benefits

- Improved qubit readout fidelity, reduced noise < 300 mK @ 6.8GHz
- Large bandwidth supports multiplexed readout
- Simple tune-up and low insertion loss for easy integration with qubit experiments


### Features

- Gain: 20 dB
- Tunable Center Frequency: 5.0 – 7.0 GHz
- Instantaneous Bandwidth: 300 MHz
- Noise temperature: 295 mK @ 6.8 GHz
- Matched input: 50 Ohm
- Die: 4 x 4 mm
- Available as bare die
- Compact aluminum cryo-package, 2.92mm K connectors
- 6-8 week delivery on order

FAST AND  
HIGH-FIDELITY  
QUBIT  
READOUT  
IN THE  
MICROWAVE  
DOMAIN

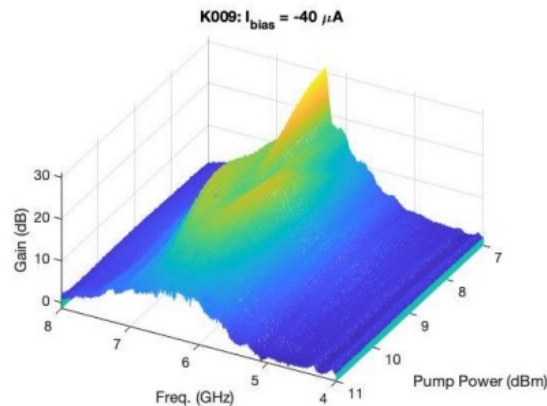


Gain Measured at 15 mK

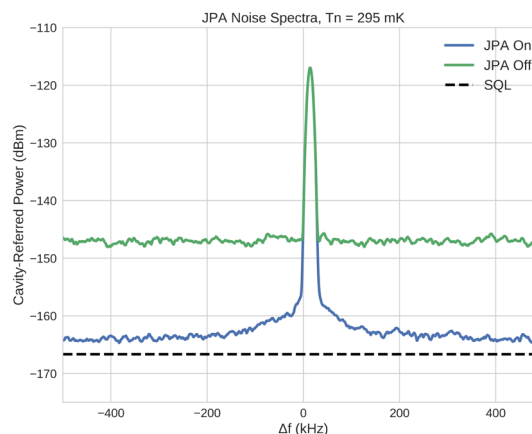


Measured Noise Temperature, 6.8 GHz



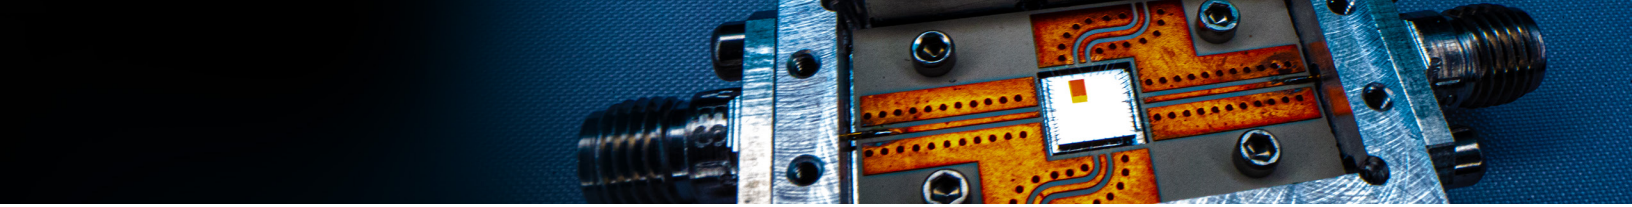


## Product Roadmap

RTX BBN develops a broad range of enabling technology for quantum computing applications using its state-of-the-art superconducting fabrication. Other products in development include traveling-wave parametric amplifiers, superconducting passive components and other microwave devices. Contact RTX BBN to discuss customization opportunities to better enable your quantum computing.

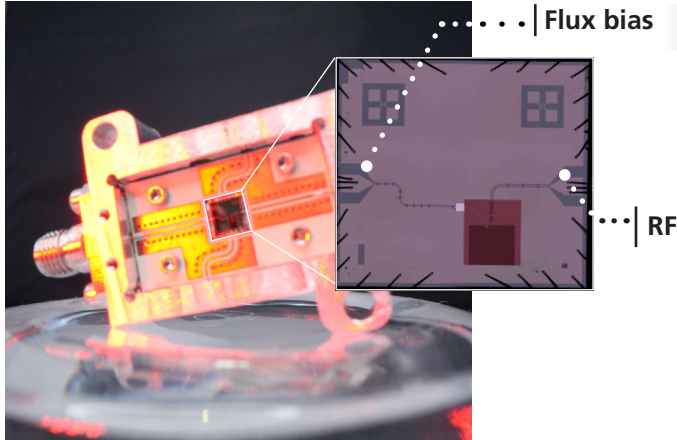

## Typical Performance Characteristics

| Parameter                                   | Typical Value | Units |
|---|---------------|-------|
| Frequency Range                             | 5.0-7.0       | GHz   |
| Bandwidth                                   | 300           | MHz   |
| Gain  | 20            | dB    |
| Noise Temperature                           | 295           | mK    |
| Input Power 1dB Compression (P1dB)          | -107.5        | dBm   |
| Flux Bias Current Periodicity ( $1\Phi_0$ ) | 4             | mA    |
| 3 Wave Operation Pump Power                 | -45           | dBm   |
| 4 Wave Operation Pump Power                 | -75           | dBm   |

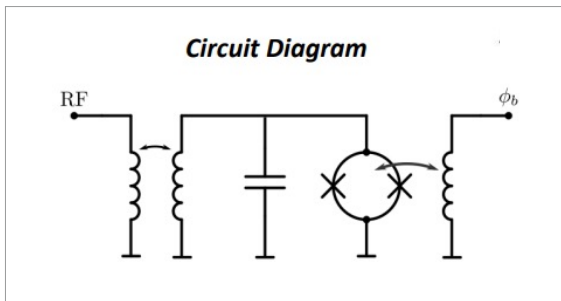

## Contact

quantummicrowave.com  
 Sales@QuantumMicrowave.com  
 857-499-0071

