





Specifications:

- WR-42 Level Set Attenuator
- Frequency: 18 to 26.5 GHz
- Micrometer Attenuation: 0 to 30 dB
- Insertion Loss: 0.3 dB typical
- Return Loss: 20 dB typical
- Power max: 1 W
- Waveguide In/Out: UG-599/U
- Square Flange
- Waveguide material: Copper
- Brass Flanges
- Finish: Gold Plated
- Comes with P/N: QMC-WGSKIT-2842



QMC-LSA42-S000 is a K Band Level Set Attenuator and covers a frequency range of 18 GHz to 26.5 GHz. This attenuator is equipped with a micrometer dial. Our attenuator is ideal for a waveguide system where broadband level setting is required.

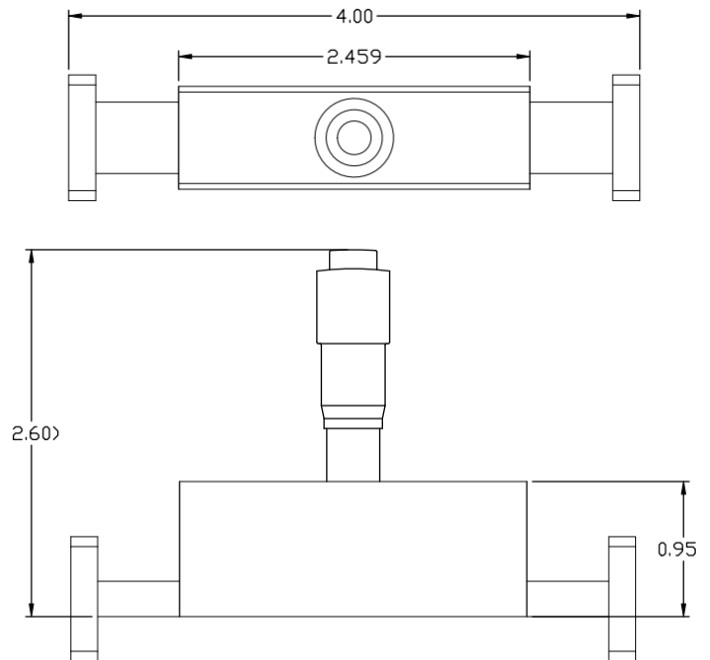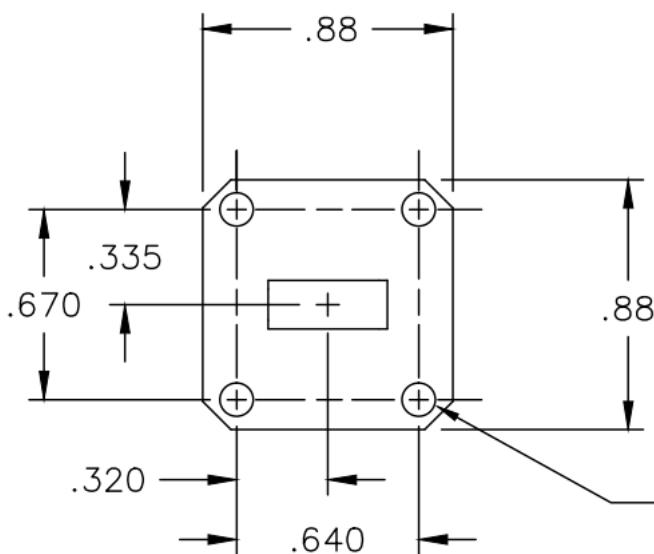

Made in the USA

✉ Sales@QuantumMicrowave.com