




Specifications:

- Cryogenic Termination
- Frequency: 4 to 12 GHz
- RF Impedance: 50 Ohms
- DC: Short Circuit
- Power: 2W ave, 200W peak
- Center Pin to Case DC Resistance: <1 Ohm
- Operating Temp: 5mK to 300 K
- Return Loss: 20 dB min
- RF Input: SMA Male
- Housing: OFHC Copper
- Finish: Gold Plated

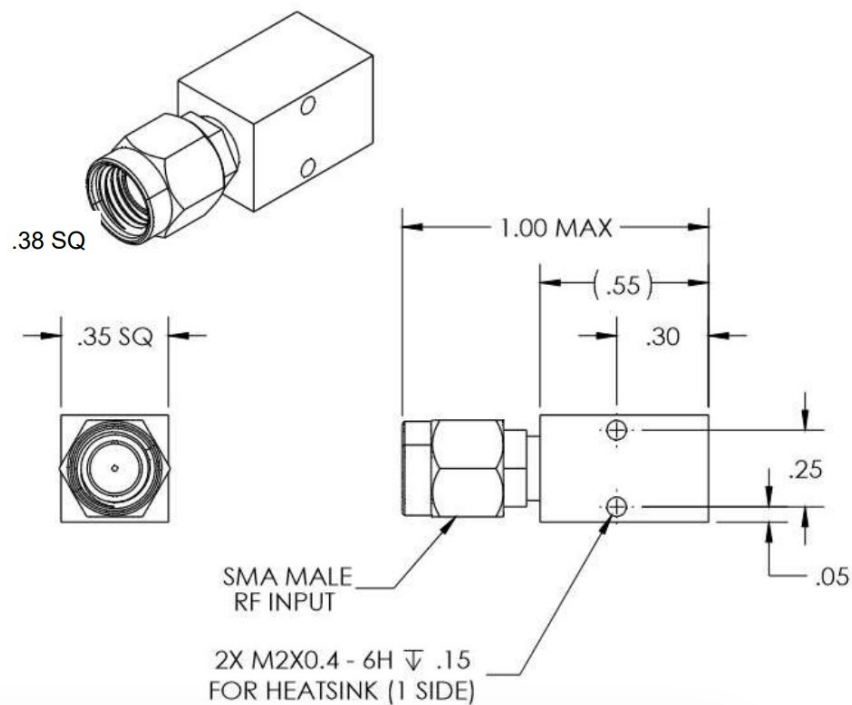

Made in the USA