


P/N: QMC-BIASTEE-0.218SMA
0.2-18 GHz Bias Tee
Features

- 0.2 GHz to 18 GHz
- Low Return Loss, -20dB typical, 2-12 GHz
- SMA bias connector
- Stackable



Parameter	Specification	Notes
Frequency Range	0.2 GHz to 18 GHz	
Insertion Loss	<1dB typical 0.2 to 18 GHz	See plot
Return Loss	-20dB typical, 0.2-12 GHz -15dB typical, 0.2 to 18 GHz	See plot
Connectors	RF+DC SMA (m) RF SMA (f) DC SMA (f)	
Max Voltage	50VDC	
Max Current	225 mA	
Housing	OFHC. Gold plated.	

Measured Data (typical)

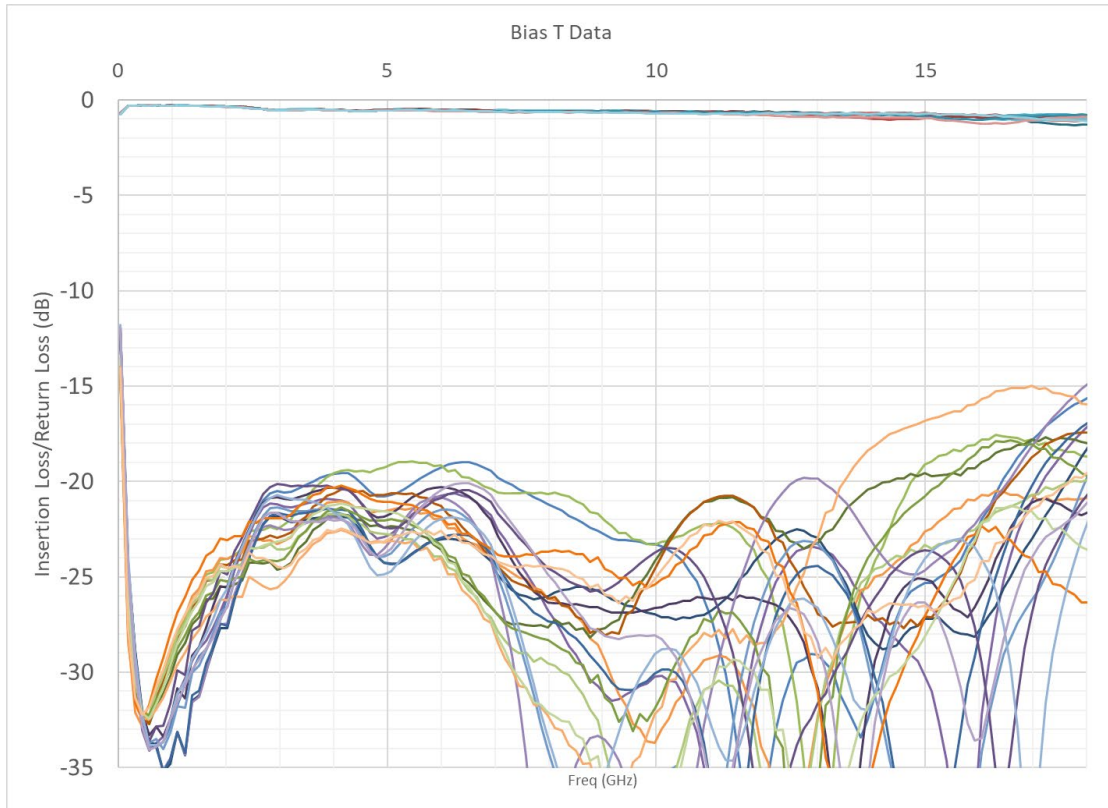

Outline Drawing

