




Specifications:

- Cryogenic Directional Coupler
- Frequency: 4 to 12 GHz
- Coupling Value: 6.5 dB
- Tolerance: 0.5 dB max
- Directivity: 20 dB typical
- Insertion Loss: 0.5 dB typical
- Input/Output Return Loss 15 dB typical
- \*Excludes loss due to coupling factor
- Power: 3W max
- Machined OFHC block, gold plated
- SMA connectors
- Stackable mechanical design
- Operation Temp: 10 mK

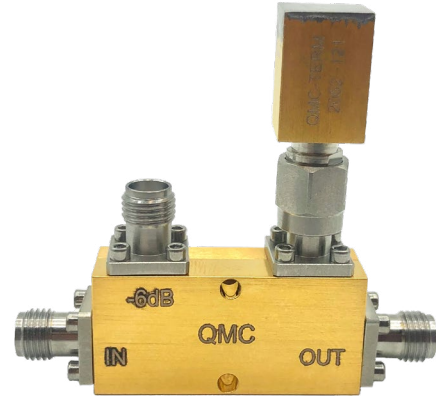

Measured Data (typical response)

