QMC-WC34-2.4FR
QuantumMicrowave.com

Specifications:

- WR-34 Waveguide to 2.4 mm F Connector
- Frequency: 22 to 33 GHz
- Insertion Loss: 0.30 dB typical
- VSWR: 1.25:1 Max
- Material: 6061-T6 Aluminum
- Finish: Chemical Film
- Waveguide: WR-34, UG-1530/U, Square
- Connector: 2.4mm F

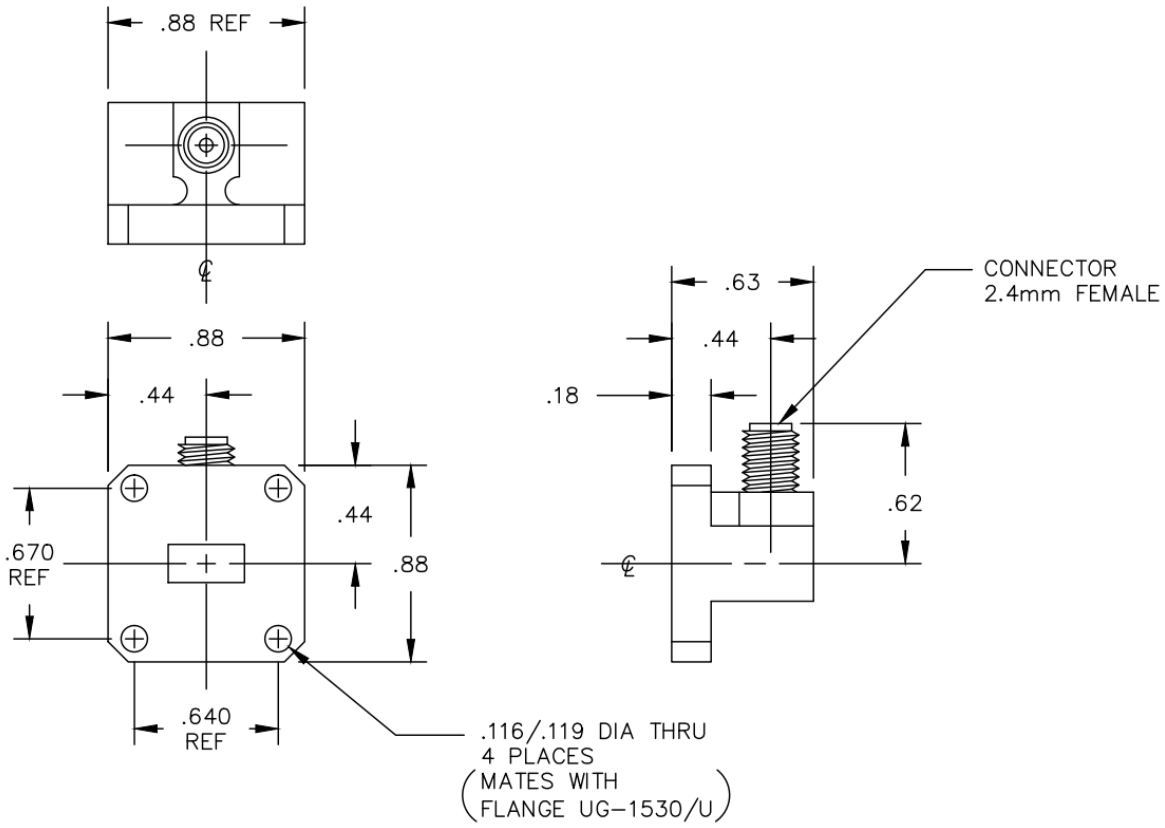

Made in the USA
✉ Sales@QuantumMicrowave.com