




Specifications:

- WR-42 Full Band Isolator
- Frequency: 18 to 26.5 GHz
- Isolation: 18 dB min
- Insertion Loss: 0.4 dB max
- VSWR: 1.3:1 typical
- Power: 1 KW Peak/5W average
- 2 W Reverse
- Waveguide: WR-42, UG595/U, Square Flange
- Operating Temp: -10 to +65C
- Comes with Mounted Termination
- Material: Aluminum Alloy
- Finish: Chem Film



All of our isolators are high quality, and offered at an affordable cost.

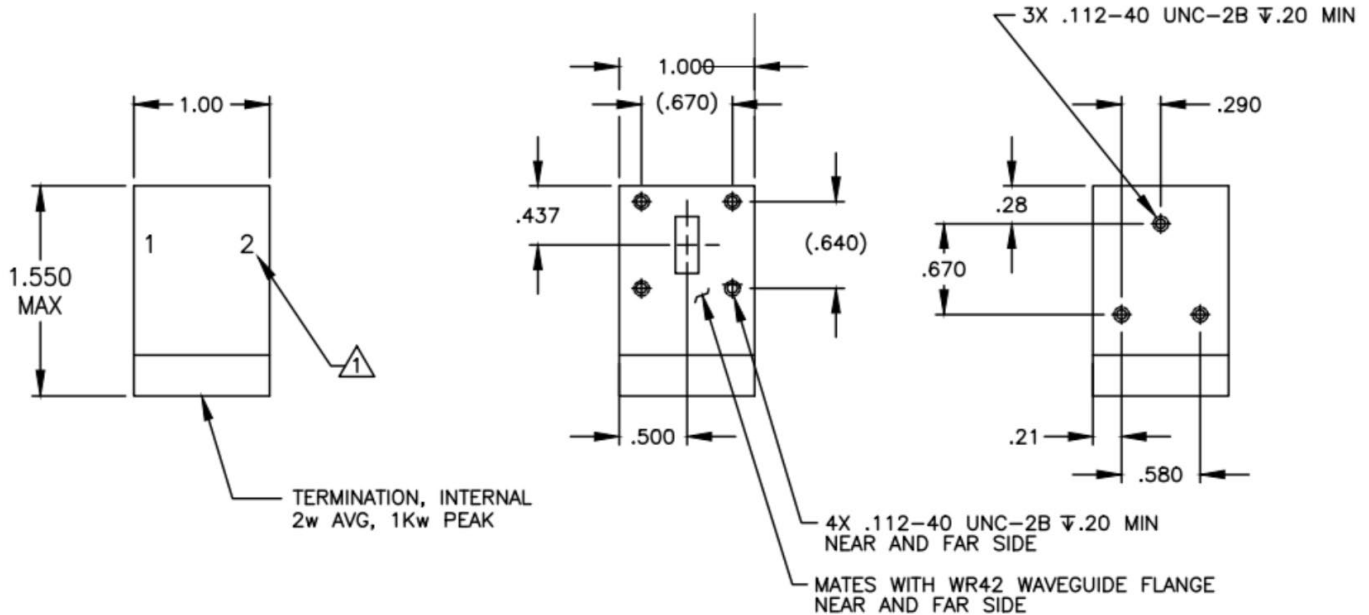

Made in the USA

✉ Sales@QuantumMicrowave.com