




Specifications:

- 8 Integrated Thru lines
- Attenuation Value: 3 dB
- Frequency: DC to 12 GHz
- Minimal change in loss with temperature
- Machined OFHC block, gold plated
- SMP/GPO connectors




Parameter	Specification	Notes
Frequency Range	DC to 12 GHz	
Attenuation Setting @5GHz	+/- 0.5 dB or +/-5% (greater of)	
Insertion Loss variation with frequency	<1.0 dB	
Return Loss, all models	-15dB typ.	
Connectors	SMP/GPO (male pin)	
Max Power Handling	100 mW	

Measured Data (Typical)

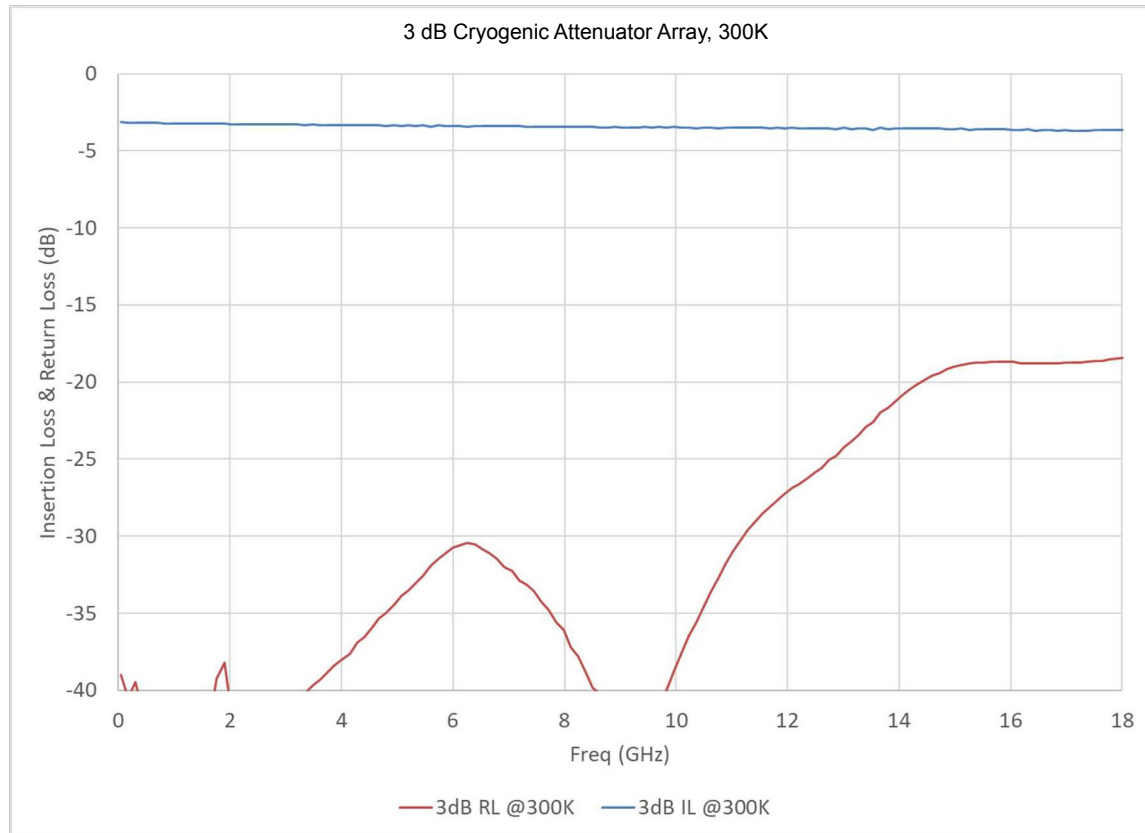

Outline Drawing

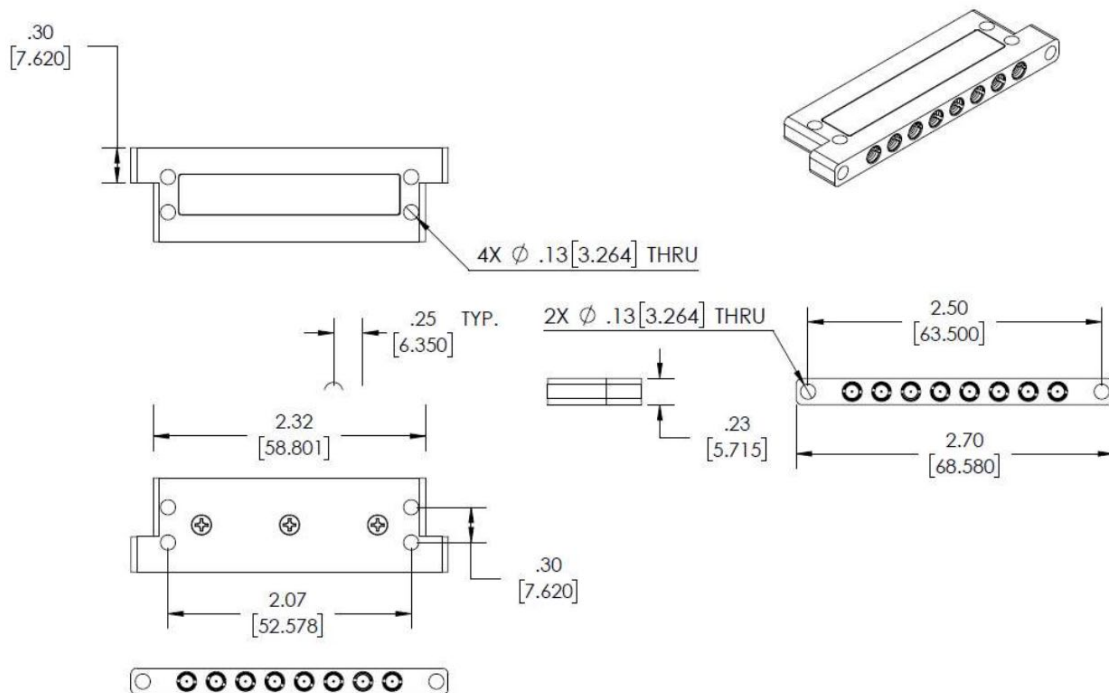

Made in the USA

✉ Sales@QuantumMicrowave.com