



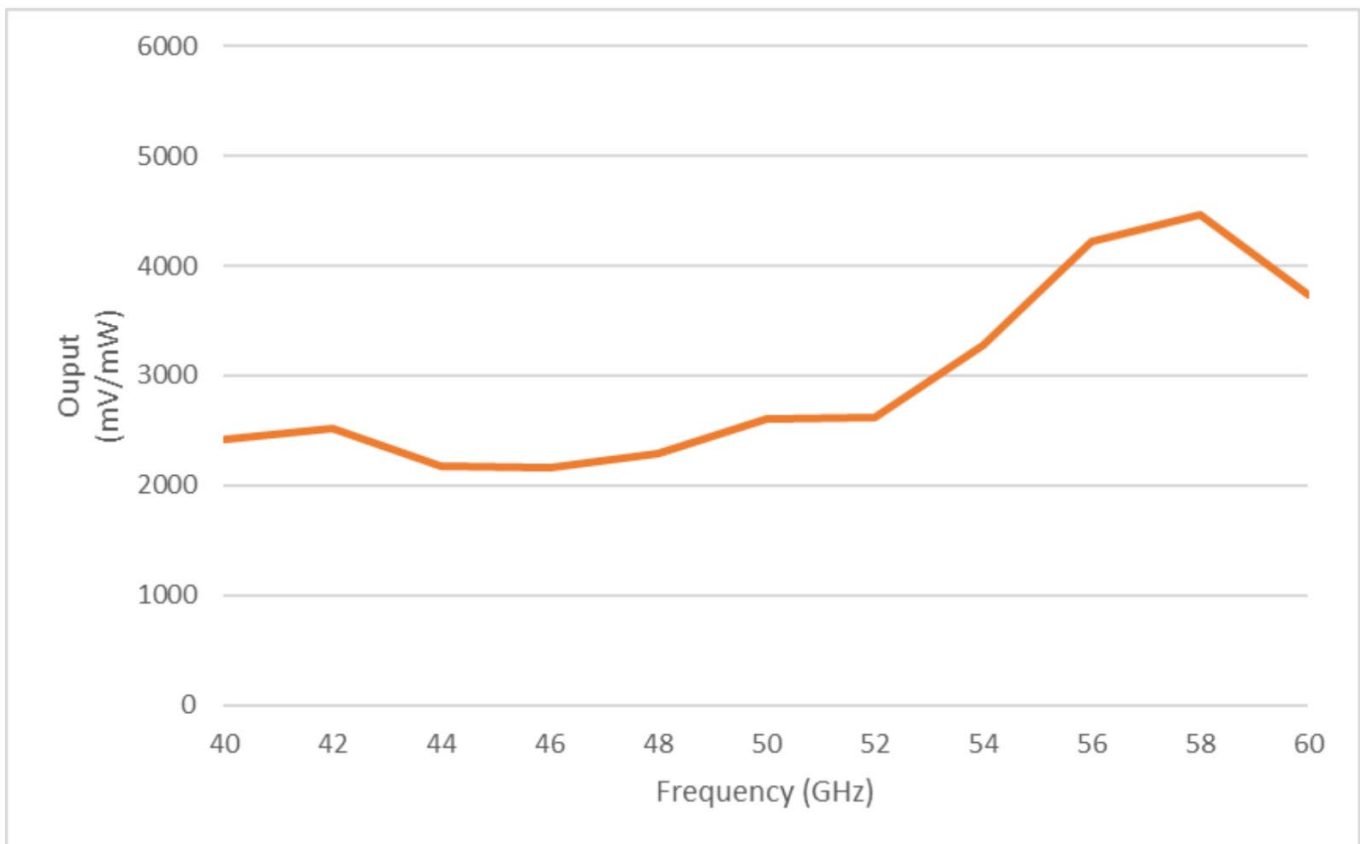

Specifications:

- WR-19 Full Band Waveguide Detector
- Frequency Range: 40 GHz to 60 GHz
- Sensitivity: 1500 mV/mW Minimum
- Flatness: +/-2.0 dB Maximum
- Linear Range: -35 to -10 dBm Typical
- Operating Range: -40 to +15 dBm Typical
- Operating Temperature: -20 °C to 70 °C Ambient
- Storage Temperature: -55 °C to +100 °C
- Input Power (CW): +17 dB
- Polarity: Positive
- Input Port: WR-19 Waveguide, UG-383/U-M Flange
- Output Port: SMA Connector, Female

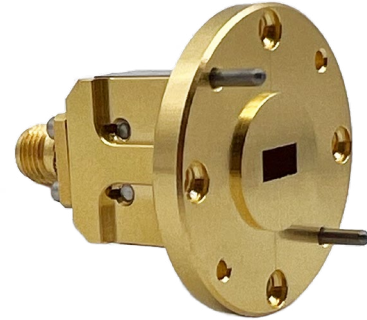

Dimensions (inches):

