





Specifications:

- High Cut-Off Frequency Infrared Filter
- Insertion loss 5 dB @ 10 GHz (typical)
- Return loss up to 10 GHz better than 20 dB (typical)
- Based on magnetically loaded dielectric absorber
- Eccosorb CR 110
- Length of absorber in filter: 2 cm
- Impedance: 50 Ω
- Capable of operation at 10 mK
- Connectors: SMA M on one side SMA F on the other
- Housing Gold Plated OFHC Copper




Typical Frequency Response:

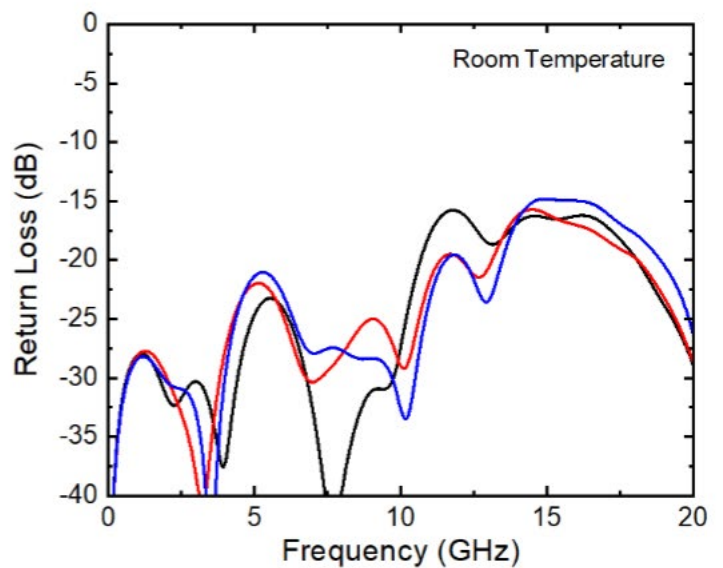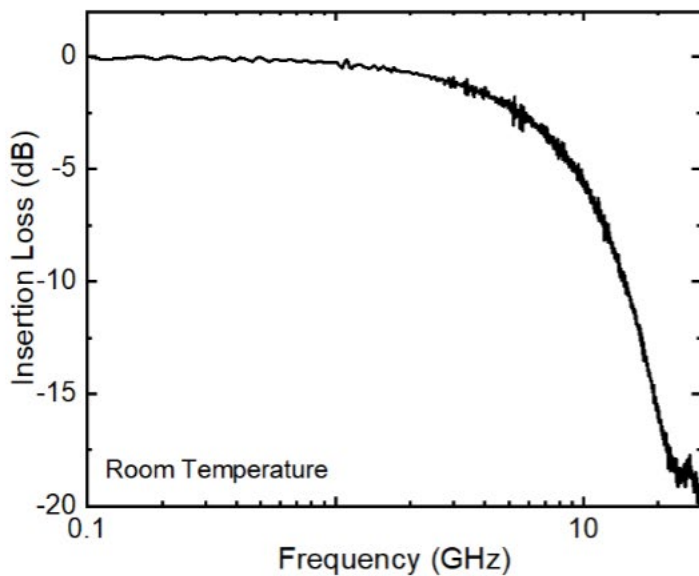

Made in the USA

✉ Sales@QuantumMicrowave.com

$\frac{7}{32}$ inch wrench flat

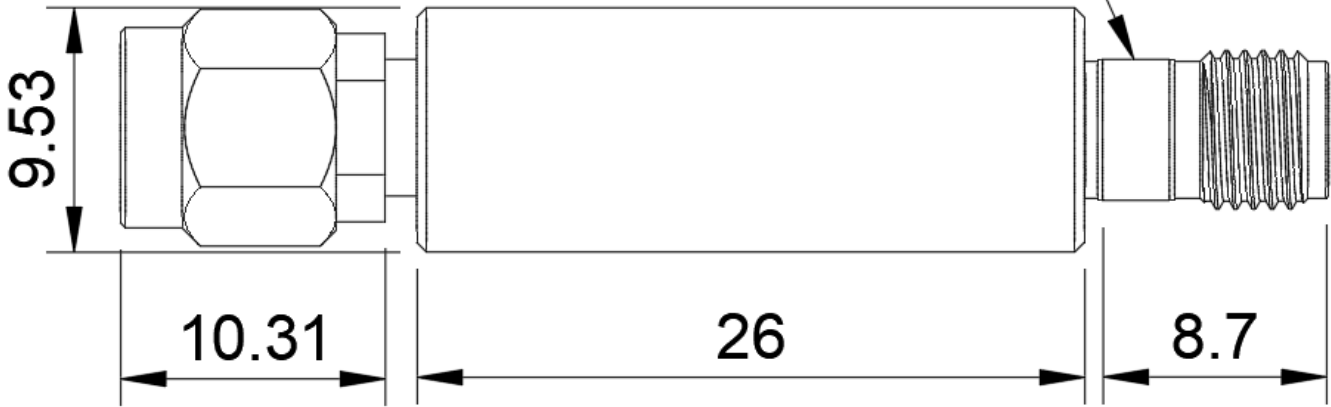

Made in the USA

✉ Sales@QuantumMicrowave.com