

Specifications:

WR-62 Full Band Isolator

Frequency: 12.4 to 18.0 GHz

Isolation: 18 dB MIN

Insertion Loss: 0.4 dB MAX

VSWR: 1.3:1 MAX

• Power: 5 Kw Peak - 10w Average

Operating Temp: -0 to +50C

Mounted Termination Mini


Material: Aluminum Alloy

Finish: RoHS Chem Film

Comes with a Waveguide Screw KIT

· Can be purchased as both an isolator or circulator



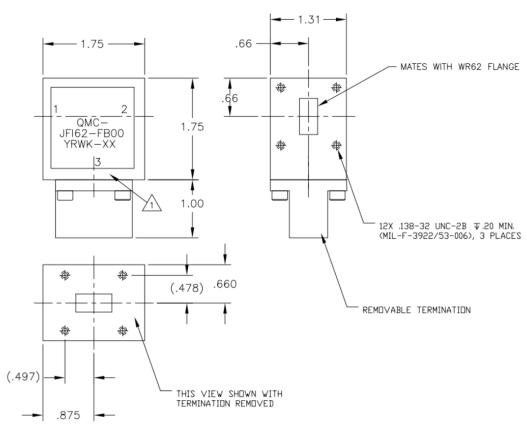

Made in the USA

☑ Sales@QuantumMicrowave.com