

Specifications:

WR-62 Full Band CirculatorFrequency: 12.4 to 18.0 GHz

Isolation: 18 dB MIN

Insertion Loss: 0.4 dB MAX

VSWR: 1.3:1 MAX

Power: 5 Kw Peak - 10w Average


Operating Temp: -0 to +50C

Material: Aluminum AlloyFinish: RoHS Chem Film

Comes with a Waveguide Screw KIT

· Can be purchased as both an isolator or circulator



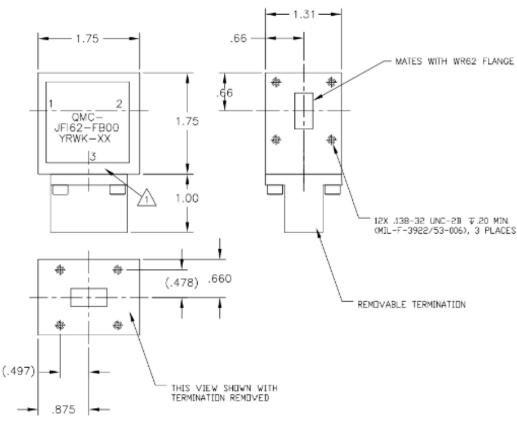

Made in the USA

☑ Sales@QuantumMicrowave.com