




Specifications:

- WR-12 SPDT Waveguide Switch
- with internal driver
- Frequency: 60 to 90 GHz
- Insertion Loss: 3 dB typical
- Isolation: 30 dB typical
- Power Handling: +23 dBm max
- Bias: +5V at 20 mA, -5V at 10 mA
- Control Signal: TTL (0V, +5V), SMA Female
- Switching speed: 50 nS
- Waveguide In/Out: WR-12, UG-387/U



All of our switches are high quality, and offered at an affordable cost.

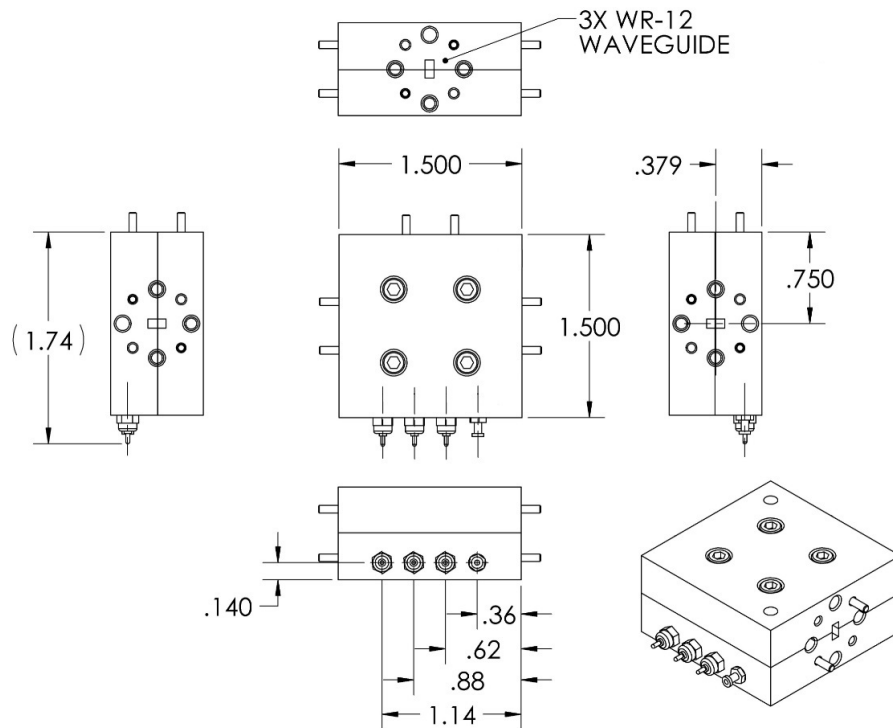

Made in the USA

✉ Sales@QuantumMicrowave.com