




Specifications:

- Non-Magnetic Cryogenic Connector (2.92 K Female)
- Field Replaceable
- 12 mil pin rear socket
- .375" 4 hole flange
- 100% Non-Magnetic
- Material: Phosphor Bronze
- Pin Material: Beryllium Copper
- Finish: Gold Plated
- Low VSWR:  
DC to 18 GHz 1.10:1 max  
18 to 40 GHz 1.15:1 max
- Low Insertion Loss
- Frequency Range: DC to 40 GHz
- RoHS, REACH and DFARS Compliant

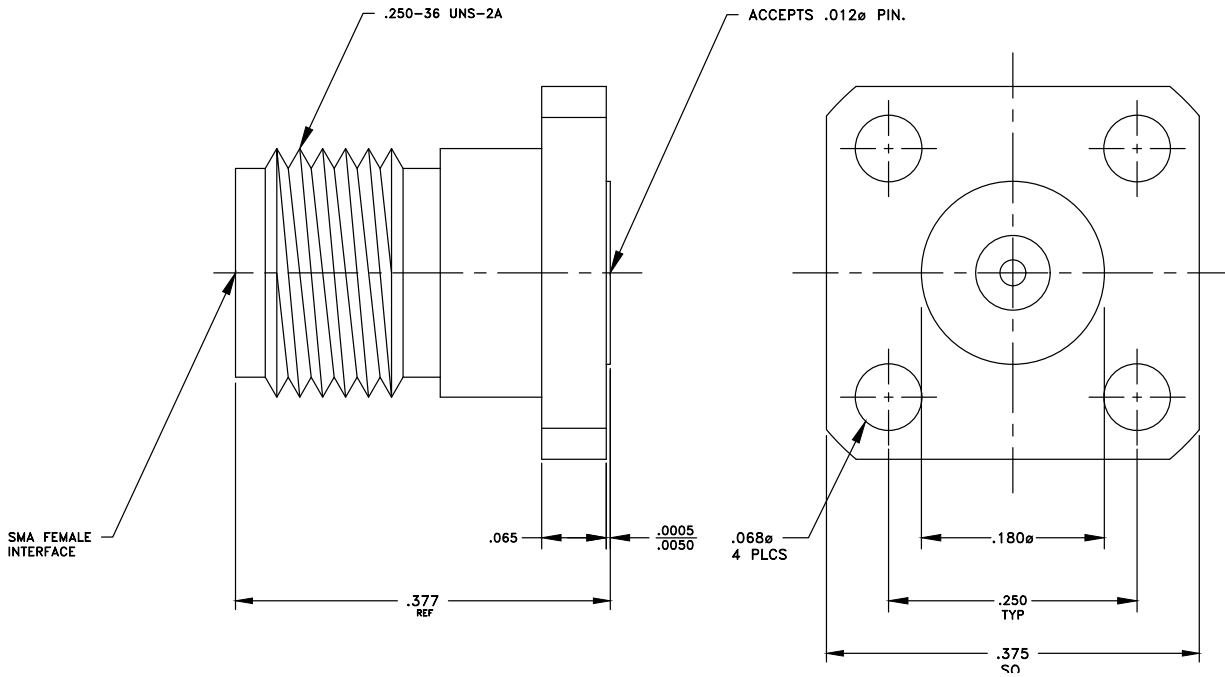

Made in the USA

✉ Sales@QuantumMicrowave.com