



www.QuantumMicrowave.com

## Customizable Precision Thermalized Non-Mag Cryogenic Coax Adapter P/N: QMC-CRYOADP-FK




This Coaxial adapter is designed so that all connectors are universally swappable

- Broadband
- Compact design
- Low Insertion Loss
- Excellent Return Loss

Parameter	Specification	Notes
Pass Band	DC to 40 GHz	
Insertion Loss	1.0 dB	
Return Loss	20 dB	
Connectors In/Out	2.92mm (F/F)	
Housing Material	Gold Plated OFHC Copper	

### Room Temperature Measured Data

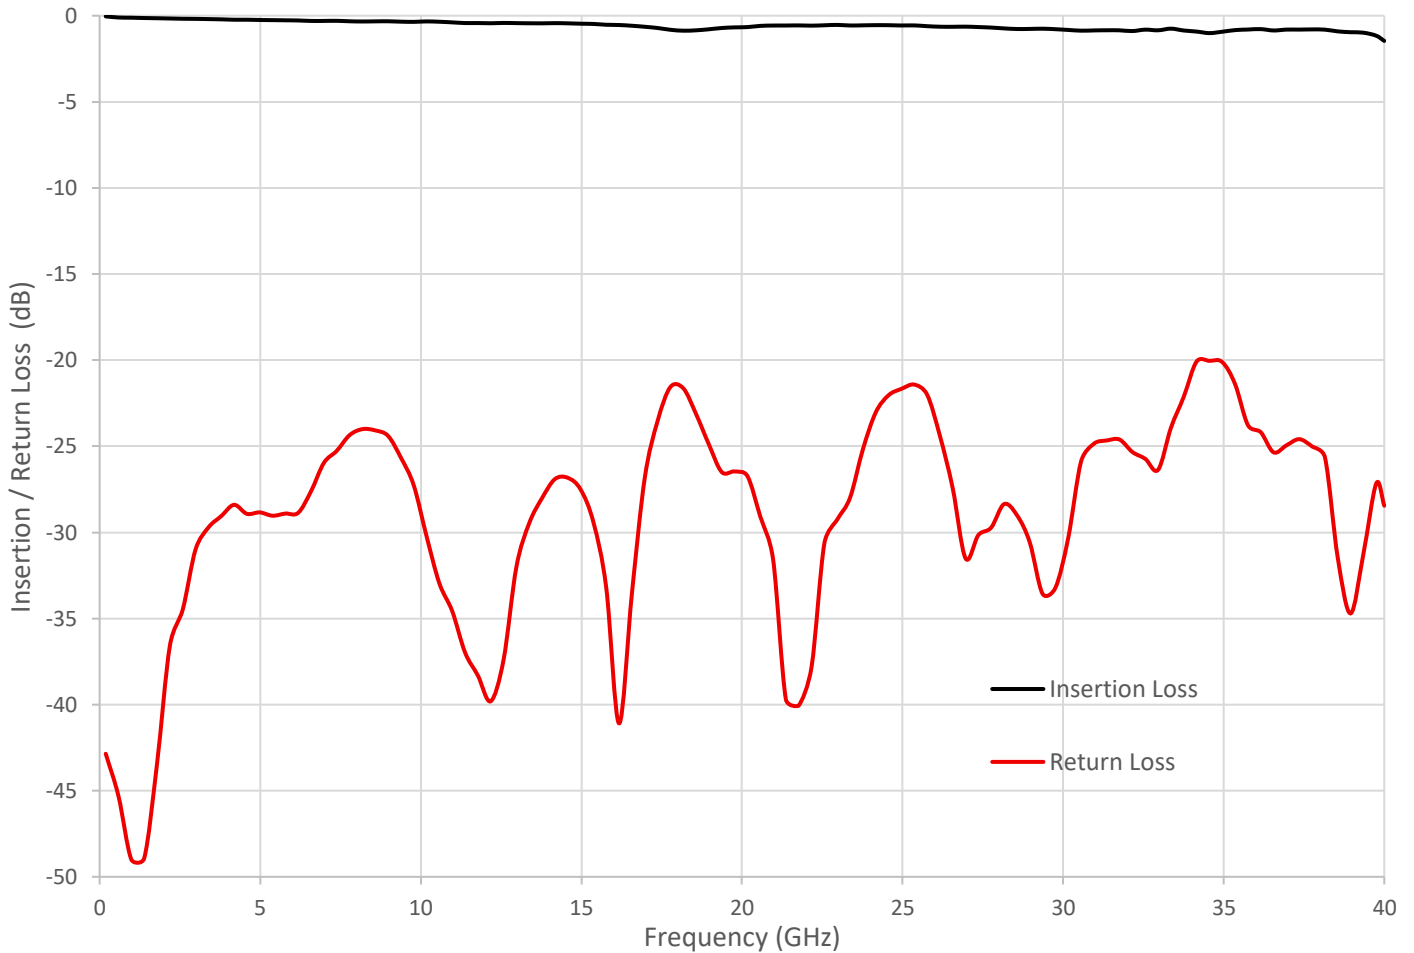

- Our Connector Types: SMA, SMP, SMPM, SMPS, 2.92mm (K), 2.4mm, 1.85mm, SMA Bulkhead
- \* All available in male and female

