

Cryogenic Low Pass Filter

P/N: QMC-CRYOLPF-060




This filter is designed for cryogenic and room temperature operation. Constructed out of high quality gold plated OFHC Copper for cryogenic use down to 10 mK.

- High out of Band Rejection
- Low Insertion Loss
- Compact design
- Cryogenic functionality

Parameter	Specification	Notes
Pass Band	Up to 6.8 GHz	
20 dB Rejection	8.35 to 26.5 GHz	
Insertion Loss	0.85 dB	
Return Loss	20 dB	
Connectors In/Out	SMA (F/M)	Non-magnetic
Housing Material	OFHC Cu / Gold Plated	Non-magnetic

Measured Data

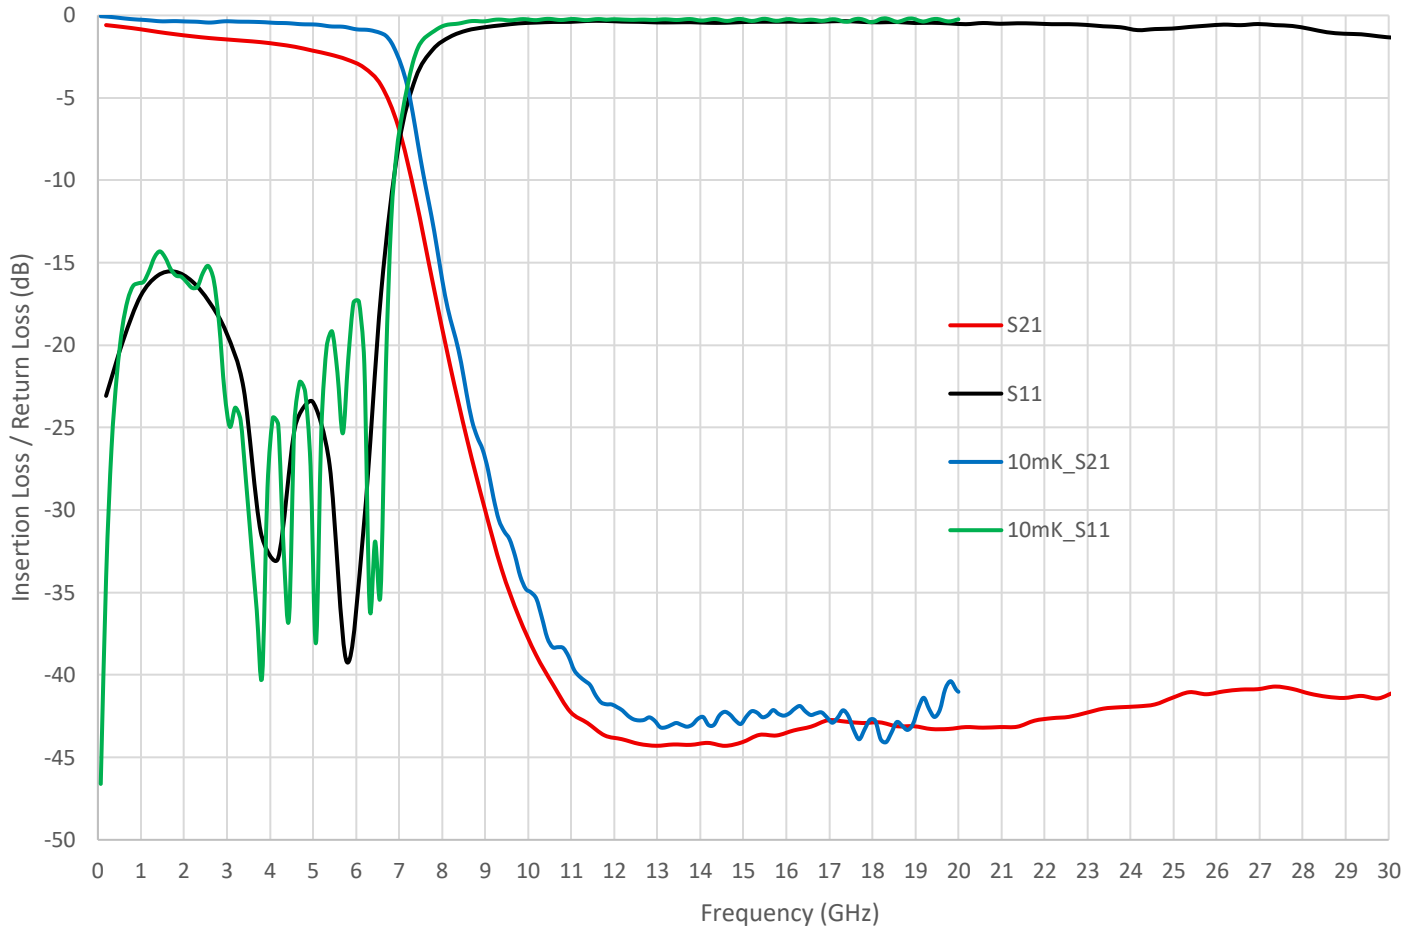

Outline Drawing

