






Specifications:

- WR-19 Waveguide to 1.85mm Female Adapter
- Frequency: 40 to 60 GHz
- Max VSWR: 1.35:1
- Connector: V-Female (1.85mm)
- Length: 1.00"
- Waveguide WR-19: UG-385/U-M (Custom 0.750" Ø)
- Copper Waveguide with Brass Flanges
- Finish: Gold Plated



QMC-WC19-1.85FR385 is a Waveguide to Female Coaxial adapter that operates within the U Band, with a frequency range of 40 to 60 GHz. This adapter is a WR-19 waveguide with precision tolerances. QMC-WC19-1.85FR385 is a gold plated, copper waveguide with brass flanges. This is a lab asset that will last for long periods of time.

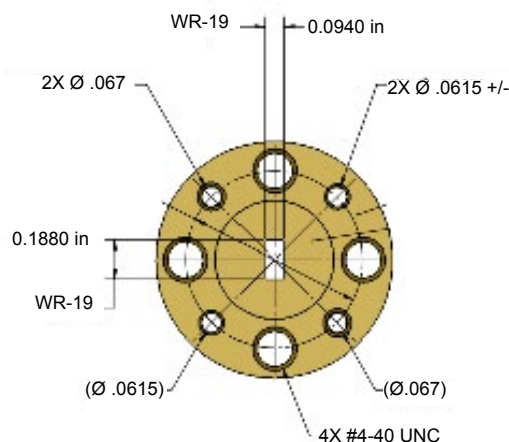

Made in the USA

✉ Sales@QuantumMicrowave.com