QMC-WC90-SFR
QuantumMicrowave.com

Specifications:

- WR-90 Waveguide to Coax Adapter
- Connector type: SMA Female
- Frequency: 8.2 to 12.4 GHz
- Insertion Loss: 0.1 dB typical
- VSWR: 1.15:1 Max
- Length: 1 inch
- Material: 6061-T6 Aluminum
- Finish: Chemical Film
- Waveguide: WR-90, Square

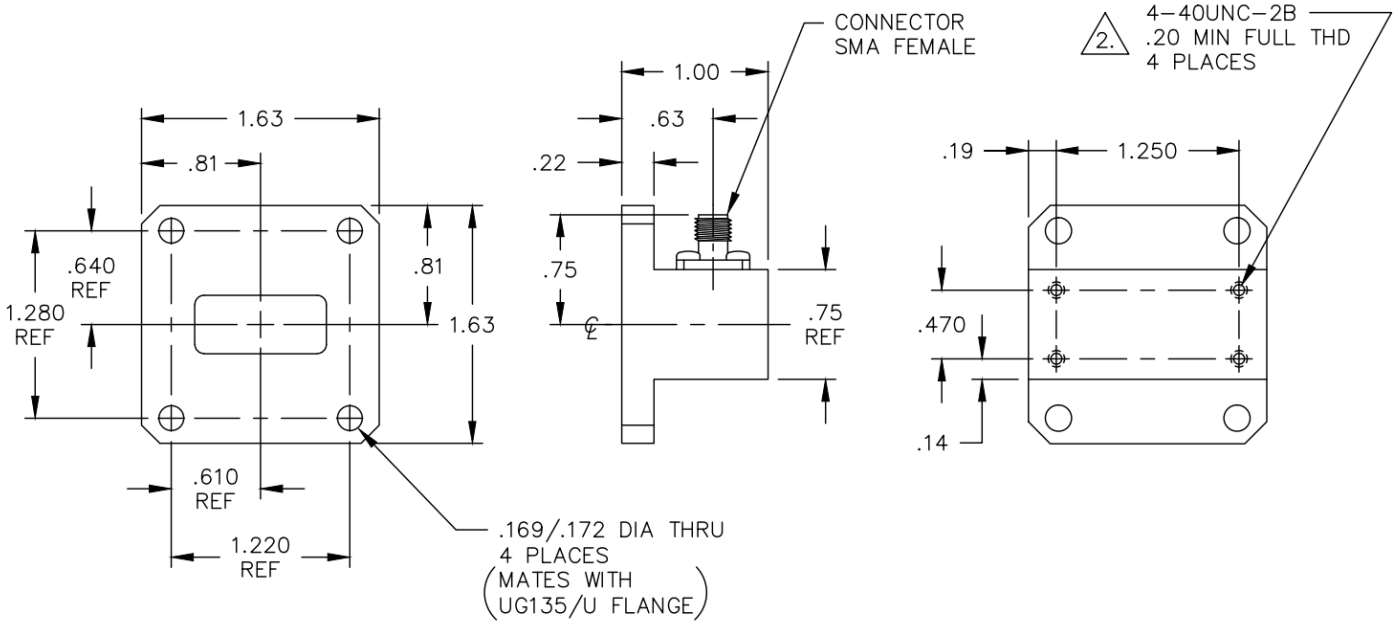

Made in the USA
✉ Sales@QuantumMicrowave.com