




Specifications:

- WR-15 Waveguide to Female Coax Adapter
- Frequency: 50 to 65 GHz
- Note: works to 70 GHz with slightly degraded performance
- Connector Type: 1.85 mm Female Coax Adapter
- Orientation: Right Angle
- VSWR: 1.5:1 max, 1.4:1 typical
- Insertion Loss: 0.75 dB max
- Waveguide Flange: WR-15, UG385/U
- Finish: Gold Plated
- Comes with 4 pieces of 4-40 Captive Waveguide Screws



Our waveguide to coax adapters are high quality, gold plated and are priced affordably.

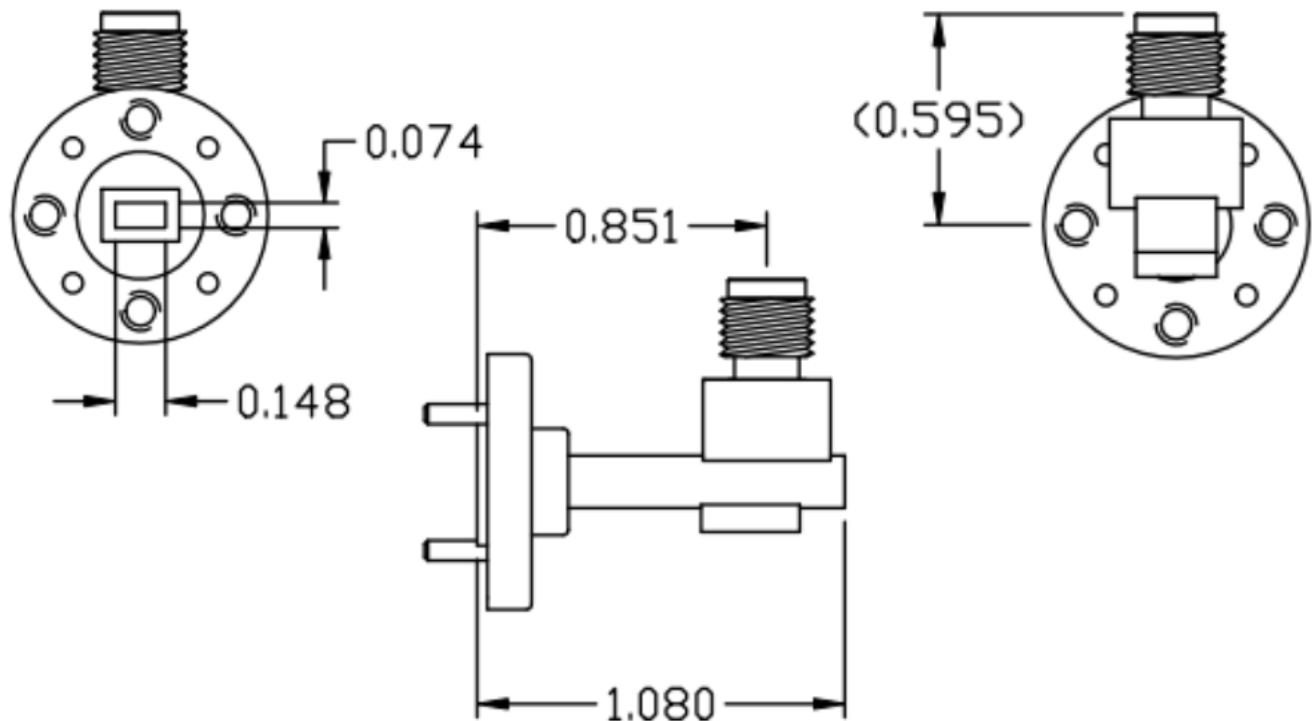

Made in the USA

✉ Sales@QuantumMicrowave.com